SMC2XXM-Z

REVISIONS			
SYM	DESCRIPTION		DATE
R.1	HOLE DIAM 0.040 --> 0.090	EAB	01/08/18
R.2	ADDED SMC211 AND SMC212	EAB	02/06/18

TABLE					
PART NUMBER	XX	"Z"	DA	DB	DD
SMC200M	00	No	8 mm	12 mm	N/A
SMC201M	01	No	10 mm	12 mm	N/A
SMC203M	03	No	10 mm	15 mm	N/A
SMC203M-HOLE	03	Yes	10 mm	15 mm	0.197 in
SMC204M	04	No	0.50 in	0.75 in	N/A
SMC206M	06	No	6 mm	9 mm	N/A
SMC206M-HOLE	06	Yes	6 mm	9 mm	0.118 in
SMC207M	07	No	12 mm	21.6 mm	N/A
SMC208M	08	No	10 mm	20 mm	N/A
SMC209M	09	No	15 mm	27 mm	N/A
SMC210M	10	No	15 mm	22 mm	N/A
SMC210M-HOLE	10	Yes	15 mm	22 mm	0.295 in
SMC211M	11	No	6 mm	10 mm	N/A
SMC211M-HOLE	11	Yes	6 mm	10 mm	0.118 in
SMC212M	12	No	12 mm	18 mm	N/A
SMC212M-HOLE	12	Yes	12 mm	18 mm	0.236

TABLE	
"M"	MATERIAL
A	Al Alloy
B	Carbon Steels (1018 Typ.)
C	303/304 Stainless Steel
D	Copper Alloys
E	Molybdenum
F	Ti Alloys
G	Nickel
J	Miscellaneous
H	Tungsten
X	Miscellaneous
Y	Miscellaneous
Z	Customer Supplied Material
BHR	HR STEEL

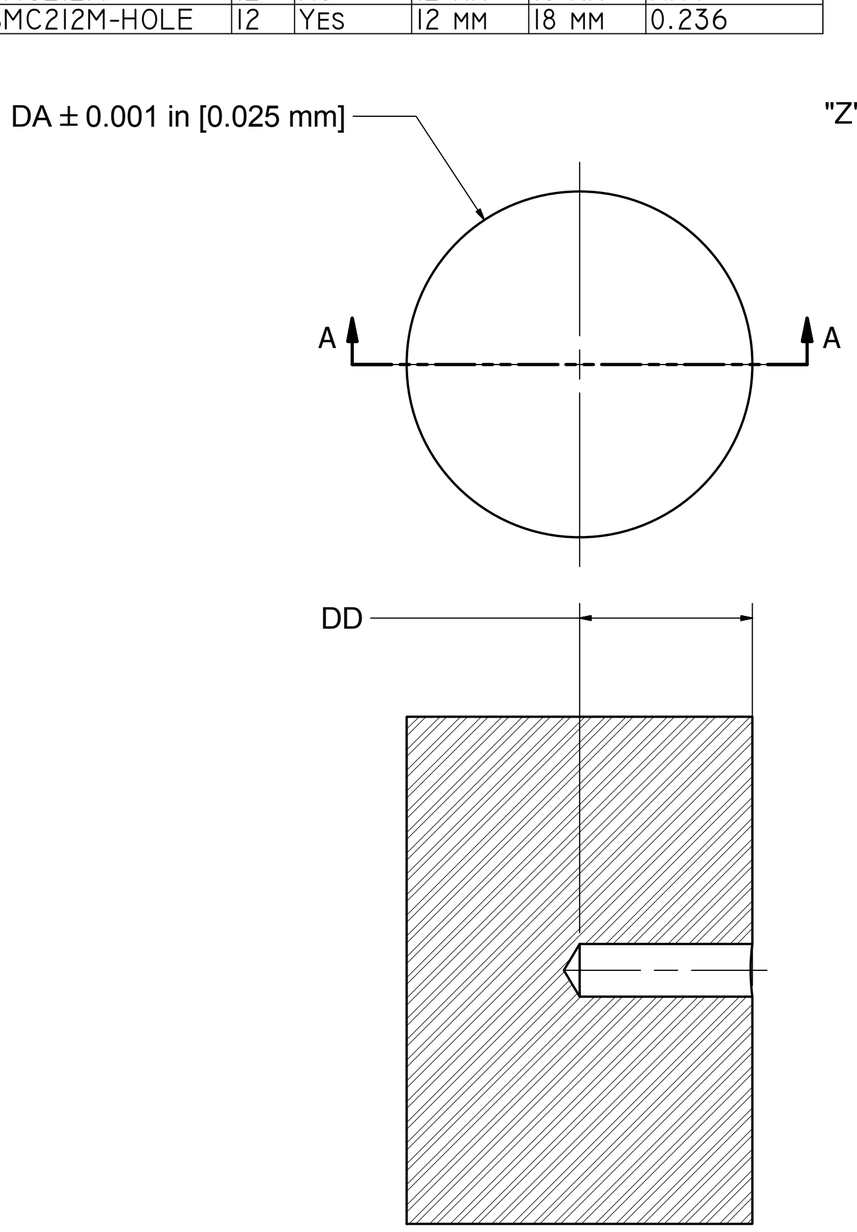

SECTION A-A
SCALE 5:1

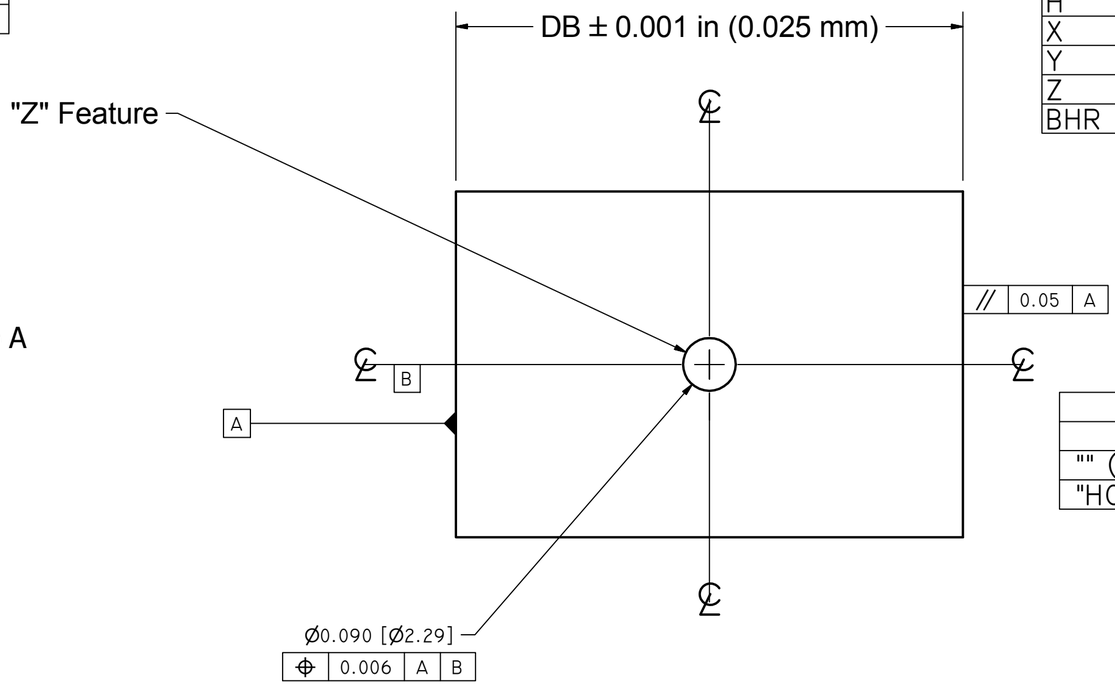

TABLE	
"Z"	OPERATION
"" (BLANK)	OMIT "Z" FEATURE
"HOLE"	INCLUDE FEATURE

DYNAMIC SYSTEMS INC. (D.S.I.) RESERVES THE RIGHT TO MAKE CHANGES AT ANY TIME IN ORDER TO IMPROVE DESIGN, AND SUPPLY THE BEST PRODUCT POSSIBLE. INFORMATION CONTAINED IN THIS PUBLICATION IS BELIEVED TO BE RELIABLE AND ACCURATE, HOWEVER RESPONSIBILITY IS NOT ASSUMED FOR ITS USE NOR FOR INFRINGEMENT OF PATENTS OR RIGHTS OF OTHERS THAT MAY RESULT FROM THEIR USE. NO LICENSE IS GRANTED BY IMPLICATION OR OTHERWISE UNDER ANY PATENT OR PATENT RIGHT OF DSI OR OTHERS.

ITEM	QTY	PART NO.	DESCRIPTION	USED ON

MATERIAL: AS NOTED
SEE "M" IN PART NUMBER

FINISH: BREAK ALL CORNERS
0.25MM (0.010 IN.)
TO 0.40 MM (0.015 IN.)
16 ELSEWHERE

DRAFTSMAN: EAB — DATE: 12/14/17
CHECKER:
ENGINEER: EAB — 12/14/17

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE
.XX 0.01 .XXXX
.XXX 0.005 FRACT. 1/64

DSI
POESTENKILL N.Y. 12140

TITLE: SPECIMEN - FLOW STRESS FAMILY WITH & W/O THERMOCOUPLE HOLE

SIZE C | SMC2XX REV. 002

SCALE 5/1 | SHEET 1 OF 1

P:\SPECIMEN\SMC2XX.IDW

QTY | USED ON